

TSP10 Mobile Seating



Century Industries

Bleacher Shown With Options

The Best Mobile Bleacher is now even Better!

Century's TSP10 TranSport Mobile Grandstand Bleachers have been newly revised to offer even more features and value.

This latest generation of Century's mobile 10 row bleachers offers more new standard features, with a redesigned configuration that complies with the latest, most widely adopted code requirements, plus 24" seat row spacing for increased spectator comfort. Careful application of materials contributes to reduced bleacher towing weight for improved economy and reduced site impact, while increasing outdoor weatherability.

Fast, effortless, simplified, one-person operation has been enhanced, allowing you to serve even more sports and special event seating opportunities.


An expanded options list offers increased customization to meet your most demanding temporary seating requirements.

Century Industries

www.centuryindustries.com Phone: 800/248-3371 - 812/246-3371

Transport MOBILE BLEACHERS

TSP10 Specifications

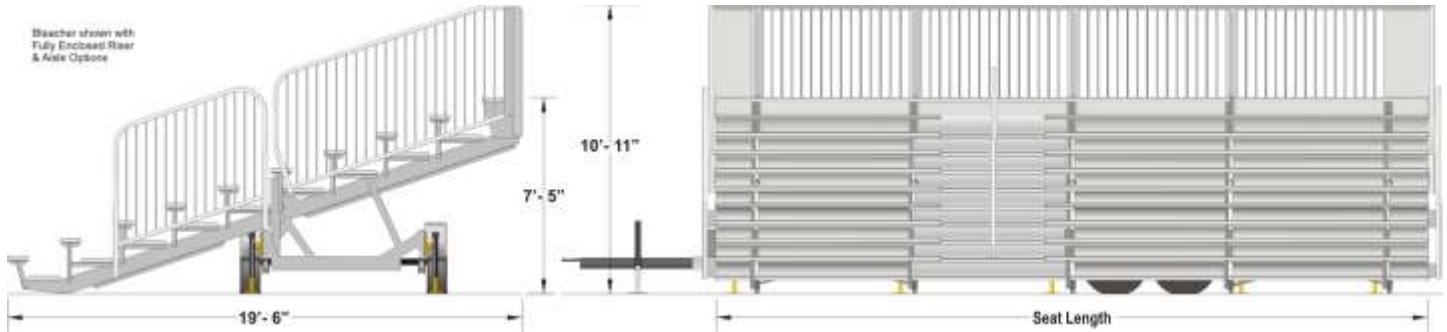

MODEL	SEATING			TRAILER DIMENSIONS			BLEACHER DIMENSIONS			Weight (lbs)
	Capacity*	Length	Rows	Width	Length**	Height	Length	Depth	Height***	
TSP10 - 180	180	27'	10	8'	37' 3"	12' 10"	33' 2"	19' 6"	7' 5"	7100
TSP10 - 260	260	39'	10	8'	49' 3"	12' 10"	45' 2"	19' 6"	7' 5"	8920
TSP10 - 300	300	45'	10	8'	55' 3"	12' 10"	51' 2"	19' 6"	7' 5"	10460

* Seating capacity calculated at 18"/seat. ** Trailer length includes hitch. *** Top seat above ground level.

Overview

- 10 Rows high
- 24" Seat row spacing for increased comfort
- Choice of seat lengths and seating capacities
- Uniform slope for increased safety and codes
- Concealed hinge points
- One person push-button setup
- Self-Stowing over-center design
- Reduced towing weight, reduced site impact
- Outdoor weather-resistant construction
- Bleacher may be set back to increase front walkway

Support Structure

- 12" steel channel main frame
- 7" steel channel support structure

Guardrails

- Aluminum construction
- Rounded guardrail frames
- Attached to bleacher structure for automatic operation

Seat & Footboards

- Full length without gaps
- Anodized aluminum seat and footboards
- Extra-width single plank footboards

Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed, easy access compartment
- Actuators do not penetrate main frame

Leveling/Support

- Multiple frame mounted support jacks permit bleacher operation on soft surfaces.
- Jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel for unlevel or uneven terrain.

Transport

- Hitch – removable, with choice of pintle or 2 5/16" ball coupler, or optional gooseneck
- Retractable hitch – permits end-to-end bleacher placement
- Tandem axle suspension for highway towing stability
- Electric brakes on all four wheels
- Highway rated tires
- Rugged equalizer leaf-spring suspension accommodates curbs and off-road towing
- Fenders with mud flaps
- LED DOT marker and signal lights

Weather Resistance

- Hot dip galvanized steel components after fabrication
- Anodized aluminum seat and footboards
- Hydraulic cylinders retracted for transport and storage

Optional Features

- Enclosed risers
- Aisle with handrail
- Full extra-width single-plank footboards
- ADA access provisions
- Fewer number of leveling/support jacks
- Gooseneck hitch