


# Transport MOBILE BLEACHERS TSP15 Specifications

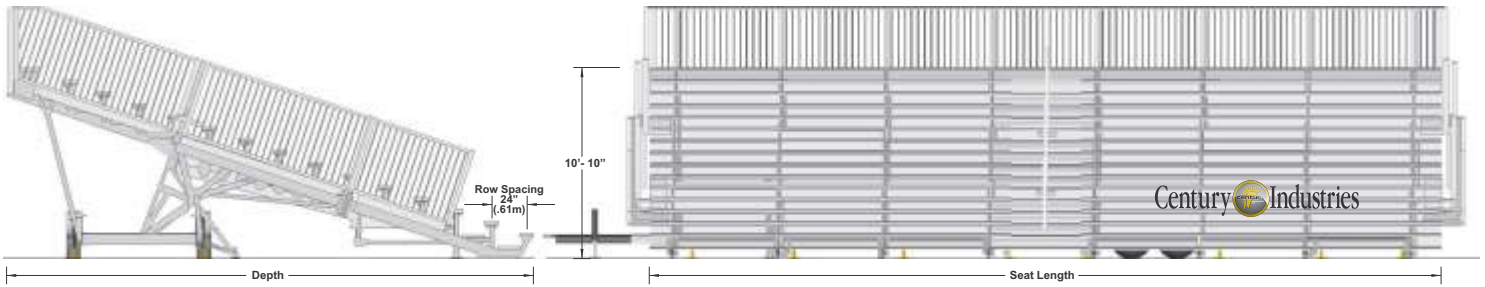

MODEL	SEATING			TRAILER DIMENSIONS			BLEACHER DIMENSIONS			Weight****
	Capacity*	Length	Rows	Width	Length**	Height	Length	Depth	Height***	
<b>TSP15 - 390</b>	390	39' (11.89m)	15	8' 3" (2.51m)	46' 9" (14.25m)	13' 2" (4.01m)	41' 9" (12.73m)	29' 10" (9.09m)	10' 10" (3.30m)	11600 lbs (5262 kg)
<b>TSP15 - 450</b>	450	45' (13.72m)	15	8' 3" (2.51m)	52' 9" (16.08m)	13' 2" (4.01m)	47' 9" (14.55m)	29' 10" (9.09m)	10' 10" (3.30m)	12900 lbs (5851 kg)

\* Seating capacity calculated at 18"/seat. \*\* Trailer length includes hitch. \*\*\* Top seat above ground level. \*\*\*\* Standard bleacher

## Overview

- 15 Rows high
- 24" Seat row spacing for increased comfort
- Choice of seat lengths and seating capacities
- Uniform slope for increased safety and code compliance
- Increased spectator visibility
- Concealed hinge points
- One person push-button setup
- Automatic stowing operation
- Extensive use of aluminum for reduced towing weight, and reduced site impact, plus corrosion resistance
- Outdoor weather-resistant construction
- Upper seats overhang allows bleacher to be set back for increased front walkway area

## Support Structure

- 12" steel channel main frame
- 7" aluminum channel support structure

## Guardrails

- Aluminum construction
- Attached to bleacher support structure for automatic operation

## Seat & Footboards

- Full length without gaps
- Extruded aluminum seat and foot planks
- Extra-width single plank footboards

## Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed, easy access compartment
- Hydraulic cylinders are retracted during transport and storage for protection.

## Leveling/Support

- Multiple frame mounted support jacks permit bleacher operation on soft surfaces.
- Jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel for unlevel or uneven terrain.

## Transport

- Hitch – removable, with choice of pintle or 2 5/16" ball coupler, or optional gooseneck
- Removable hitch – permits end-to-end bleacher placement
- Tandem axle suspension for highway towing stability
- Electric brakes on all four wheels
- Highway rated tires
- Rugged equalizer leaf-spring suspension accommodates curbs and off-road towing
- Fenders with mud flaps
- LED DOT marker and signal lights

## Weather Resistance

- Hot dip galvanized steel components after fabrication
- Aluminum channel support structure
- Anodized aluminum seatboards
- Hydraulic cylinders retracted for transport and storage

## Code Compliance

- IBC - Enclosed risers, aisleway, extra-width footboards
- DOT - Highway towing

## Optional Features

- ADA access provisions
- Fewer number of leveling/support jacks
- Gooseneck hitch
- Wireless remote controller
- Solar battery charger