



Premium Special Event Seating

Century's mobile TSP8VIP TranSport Mobile Grandstands offer premium seating with enhanced spectator comfort for your outdoor special events.


TSP8VIP grandstands feature 8 rows of all-weather molded individual seats with backrests and folding seat bottoms.

Equipped with a self-contained hydraulic actuation system, TSP8VIP bleachers feature push-button operation, and time saving efficiency. Extensive use of aluminum keeps towing weight to a minimum, reducing site impact while enhancing corrosion resistance.

Optional features including sun or weather canopies permit custom tailoring of the grandstands for increased spectator comfort.

Transport MOBILE BLEACHERS

TSPVIP8 Specifications

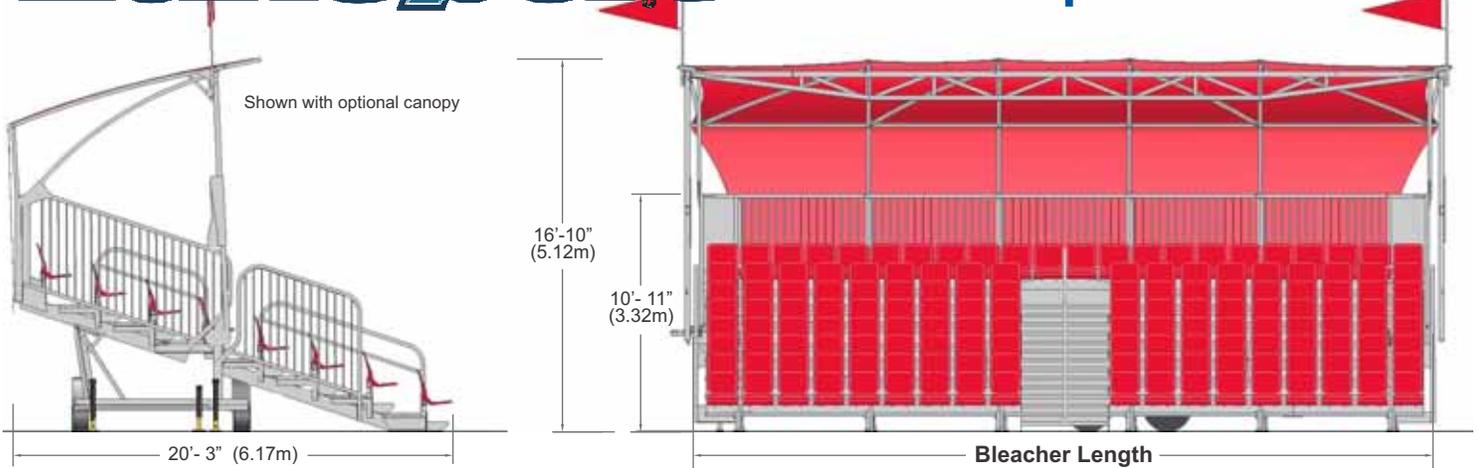

MODEL	SEATING			TRAILER DIMENSIONS			BLEACHER DIMENSIONS			Weight **
	Capacity*	Rows	Length	Width	Length**	Height	Length	Depth	Height **	
TSPVIP8 - 32	147	8	31'-6" (9.60 m)	8'-2" (2.49 m)	38'-5" (11.71 m)	13' (3.97 m)	32'-6" (9.91 m)	20'-3" (6.17 m)	10'-11" (3.33 m)	6940 lbs (3150 kg)
TSPVIP8 - 45	219	8	45'-0" (13.72 m)	8'-2" (2.49 m)	51'-11" (15.82 m)	13' (3.97 m)	46' (14.02 m)	20'-3" (6.17 m)	10'-11" (3.33 m)	8750 lbs (4000 kg)

* Seating capacity calculated without armrest option. ** Trailer length includes hitch. *** Guardrail above ground level. **** Standard Bleacher

Overview

- 8 Seat rows
- Individual weather-resistant seats with backs and flip-up seat bottoms
- 30" Seat row spacing for increased comfort
- Aisle with ADA handrails - standard
- Uniform slope for increased safety and codes
- Concealed hinge points
- Push-button hydraulically powered setup
- Reduced towing weight, reduced site impact
- Outdoor weather-resistant construction
- IBC2009 code compliance standard

Support Structure

- 7" aluminum channel support structure

Guardrails

- Aluminum construction
- Rounded guardrails for spectator comfort
- Attached to bleacher structure for automatic set up and positioning

Footboards

- Full-width footboards
- Enclosed risers - standard

Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed compartment
- Hydraulic actuation cylinder is retracted during transport and storage for maximum protection from damage and corrosion.

Leveling/Support

- Multiple jacks permit bleacher operation on soft surfaces.
- Automatically deployed jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel on unlevel or uneven terrain.

Transport

- Hitch – retractable, with choice of pintle, 2 5/16" ball coupler, or 2" (50mm) ball coupler
- Retractable hitch – permits end-to-end bleacher placement
- Electric brakes
- Highway rated tires
- Rugged rubber-ride suspension
- Fenders with mud flaps
- LED DOT marker and signal lights

Weather Resistance

- Steel components plated or hot-dipped galvanized after fabrication
- Extensive use of corrosion-resistant aluminum
- Molded seats

Optional Features

- Sun or weather canopy
- Cup holders
- Numbered seats
- Solar battery charger
- Hydraulic brakes
- Spare tire

06/2013