

4500

FrontRow

MOBILE STAGES

FrontRow mobile stages offer professional outdoor staging at event sites throughout your community. Highway-towable **FrontRow 4500** series mobile stages feature attractive, commercial, covered staging with fast setup.

FrontRow stages offer a choice of stage deck sizes with a raised roof canopy that extends beyond the stage deck on all sides for maximum performer protection. Audience visibility is enhanced by open-sightline canopy supports that eliminate the need for front corner support columns.

Wireless push-button controllers expedite stage setup and enhance safety by allowing the stage operator to move for maximum visibility. A quiet electric/hydraulic actuation system increases safety by allowing setup crew to converse easily. No combustion engine to maintain - no exhaust.


Choose from many available optional features to tailor a **FrontRow** stage to meet individual performance requirements. Banners and super graphics are available to promote events and your organization.



Stage Features

- Fast, easy setup
- Hydraulic Operation
- DC Electric Power
- Choice of Stage Sizes
- All-Weather
- Aluminum Frame
- Open Sightlines
- Electric System
- Leveling Jacks
- Deck Leveling Trusses
- Stairs
- LED Setup Lights
- Tandem-axle
- Electric Brakes
- Highway Lights & Markings

Optional Features

- Built-in Handicap Lift
- Built-in Generator
- Flybay Covers
- Monitor/Mix Decks
- Deck Extensions
- Guardrails
- Windwalls
- Banners
- Super Graphics
- Choice of Hitches
- Perimeter Skirt
- Enclosed Storage

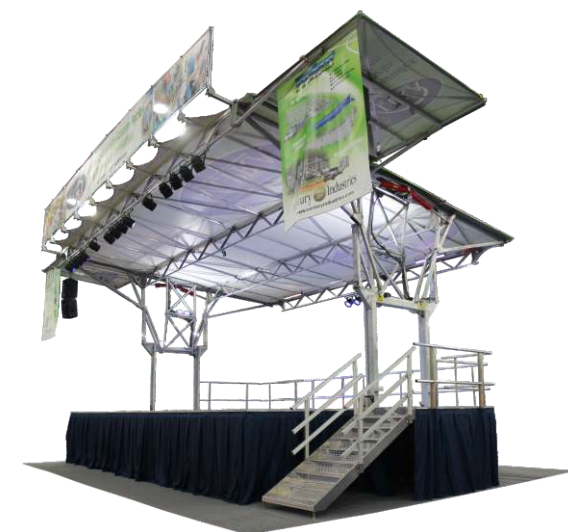

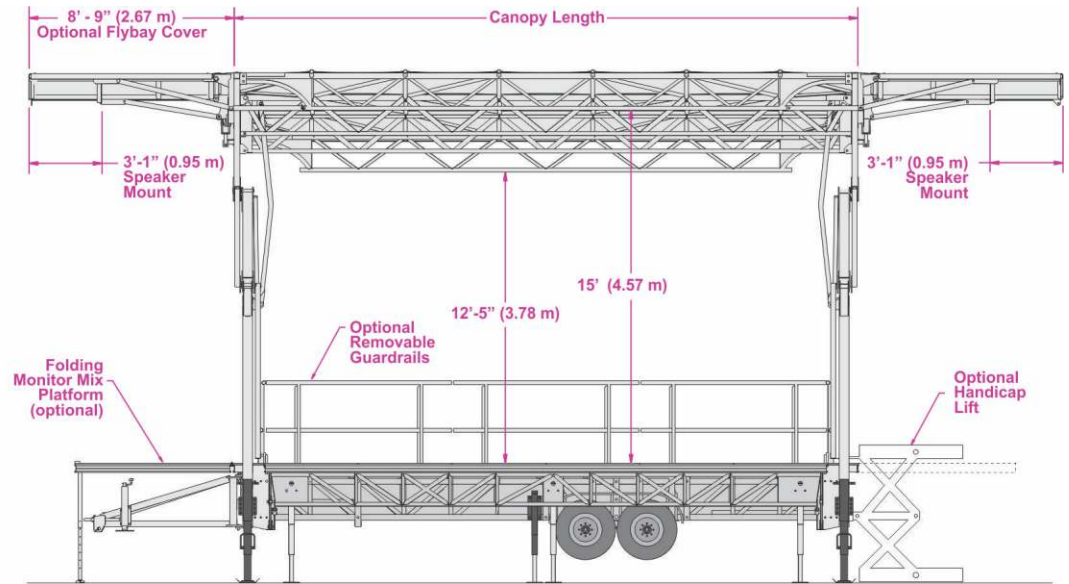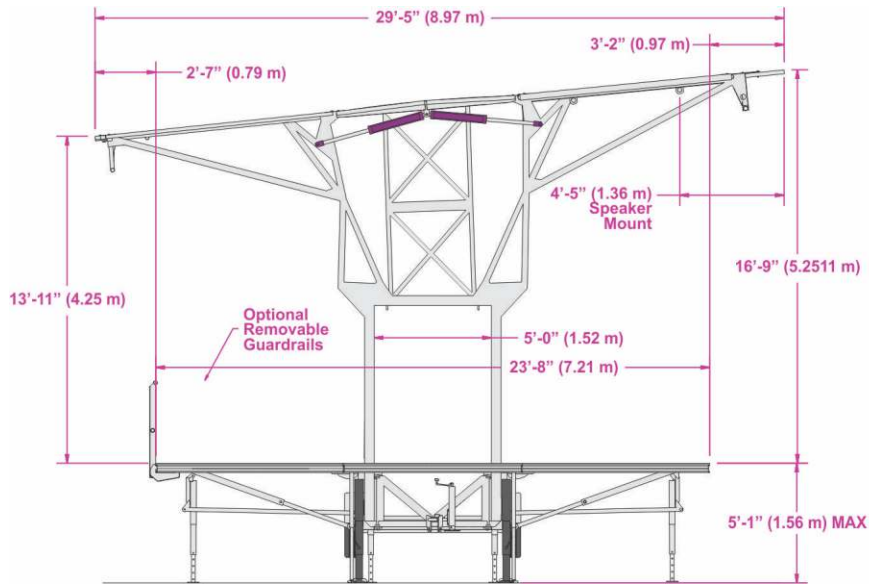


FrontRow

MOBILE STAGES

STAGE	FR4524	FR4532	FR4540
Stage Deck Dimensions L x W	24'1" x 23'8" (7.34m x 7.21m)	32'1" x 23'8" (9.78m x 7.21m)	40'1" x 23'8" (12.22m x 7.21m)
Stage Deck Height Range	48" - 61" (122cm - 15cm)	48" - 61" (122 cm - 15cm)	48" - 61" (122 cm - 15cm)
Canopy Dimensions L x W	28' 1" x 29' 0" (8.56m x 8.84m)	36' 1" x 29' 0" (11.00m x 8.84m)	44' 1" x 29' 0" (14.44m x 8.84m)
Canopy Trim Height - Front	15' (4.57m)	15' (4.57m)	15' (4.57m)
Canopy Trim Height - Rear	12'7" (3.84m)	12'7" (3.84m)	12'7" (3.84m)

LOADING CAPACITIES			
Total Load Capacity	6000 lbs	6000 lbs	4400 lbs
Main Trusses (4) - (evenly distributed)	1000 lbs ea	1000 lbs ea	700 lbs ea
Optional Speaker Hangers - (1) ea end	1000 lbs ea	1000 lbs ea	800 lbs ea
Wind Gust - standard stage	85 mph	85 mph	85 mph
Wind Gust - with Flybays	81 mph	78 mph	78 mph
Wind Gust - with Flybays & Windwall	60 mph	60 mph	60 mph
Stage Deck Live Load	100lbs/sq ft	100lbs/sq ft	100lbs/sq ft

TOWING			
OAL - including standard hitch	34' (10.36m)	42' (12.80m)	49' (14.94m)
Width	8' 4" (2.54m)	8' 4" (2.54m)	8' 4" (2.54m)
Height	13' 2" (4.01m)	13' 2" (4.01m)	13' 2" (4.01m)
Vehicle Weight (empty) - Base Stage	10,800 lbs	12,100 lbs	14,600 lbs
GVWR	16,000 lbs	16,600 lbs	18,900 lbs
Payload	5,200 lbs	4,500 lbs	4,300 lbs
Hitch	Pintle	Pintle	Pintle

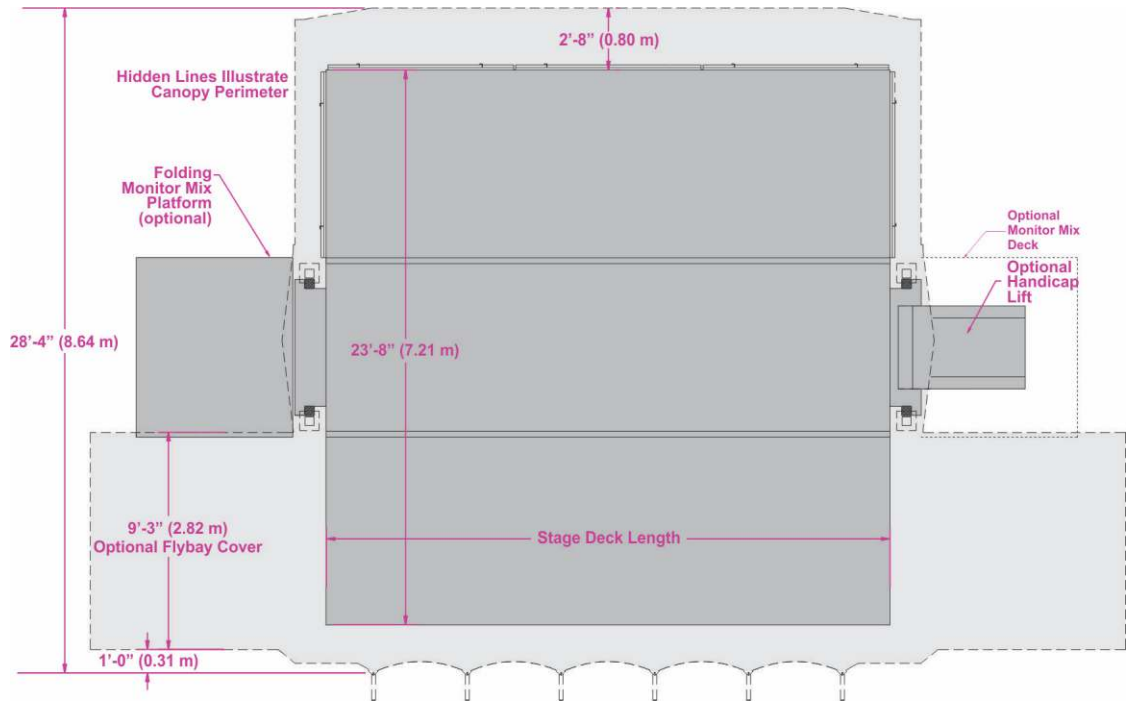

(812) 246-3371



www.centuryindustries.com