


TranSport
MOBILE BLEACHERS



FIFTEEN-RROW
MOBILE GRANDSTAND

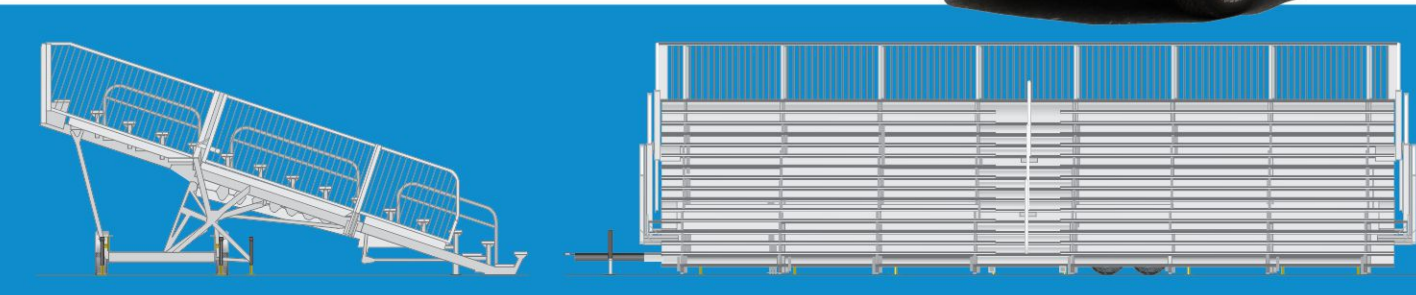

TSP15

STANDARD FEATURES

TSP15 TranSport Mobile Grandstands offer increased seating capacity and enhanced visibility spectator seating for outdoor events. **TSP15** grandstands deliver more seats per truckload than conventional mobile bleachers.

Equipped with a self-contained hydraulic actuation system, **TSP15** grandstands feature push-button operation and time saving efficiency with one-person setup. When folded to highway width, they can be transported throughout the community.

TSP15 mobile bleachers are built from weather resistant materials to withstand outdoor use.

Overview

- Elevated 15 Row high seating
- Increased spectator visibility
- 24" Seat row spacing for increased comfort
- Aisle with ADA handrails - standard
- Uniform slope for increased safety and codes
- Concealed hinge points
- One person push-button setup
- Automatic stowing operation
- Reduced towing weight, reduced site impact
- Outdoor weather-resistant construction
- Upper seat overhang allows grandstand set back for increased front walkway area
- Delivered fully assembled, ready for use

Guardrails

- Aluminum construction
- Rounded guardrails for comfort
- Attached to bleacher structure for automatic set up
- End guardrails are removable to allow end-to-end bleacher placement

Leveling/Support

- Multiple frame mounted support jacks permit bleacher operation on soft surfaces.
- Jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel for unlevel or uneven terrain.

Seat & Footboards

- Full length without gaps
- Extruded aluminum seat and foot planks
- Extra-width one-piece footboards

Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed compartment
- Hydraulic actuation cylinder is retracted during transport and storage for maximum protection from damage and corrosion.
- Actuator does not penetrate main frame

Transport

- Hitch – removable with choice of pintle, 2 5/16" ball coupler, or optional gooseneck
- Removable hitch – permits end-to-end bleacher placement
- Electric brakes on four wheels
- Highway rated tires
- Rugged torsion tandem axle suspension accommodates curbs and off-road towing
- Fenders with mud flaps
- LED DOT marker and signal lights

Weather Resistance

- Steel components plated or hot-dip galvanized after fabrication
- Aluminum channel support structure
- Anodized aluminum seatplanks

IBC Code Provisions

- Aisleway with handrails
- Vertical riser enclosures
- Extra-width single plank footboards

Optional Features

- ADA provisions
- Enclosed storage compartment
- Solar battery charger
- Spare tire
- Fifth-wheel hitch

SPECIFICATIONS

	TSP15 39	TSP15 45
Setup		
Seat Rows	15	15
Capacity (with Aisle)	352	412
Seat Length	39'- 0" (11.89m)	45'- 0" (13.72m)
Overall Length	40'- 4" (12.29m)	46'- 4" (14.12m)
Overall Depth	29'- 10" (9.09m)	29'- 10" (9.09m)
Overall Height	13'- 3" (4.04m)	13'- 3" (4.04m)
Height - Top Row	10'- 10" (3.30m)	10'- 10" (3.30m)
Towing		
Axles	2	2
Coupler	Choice of Ball or Pintle	
Length	46'- 9" (14.25m)	52'- 9" (16.08m)
Width	8'- 6" (2.59m)	8'- 6" (2.59m)
Height	13'- 3" (4.04m)	13'- 3" (4.04m)
Tow Weight	11600 lbs (5262 kg)	12900 lbs (5851 kg)
Compliance		
IBC 2018		
DOT		

Specifications subject to change without notice.