



TranSport
MOBILE BLEACHERS

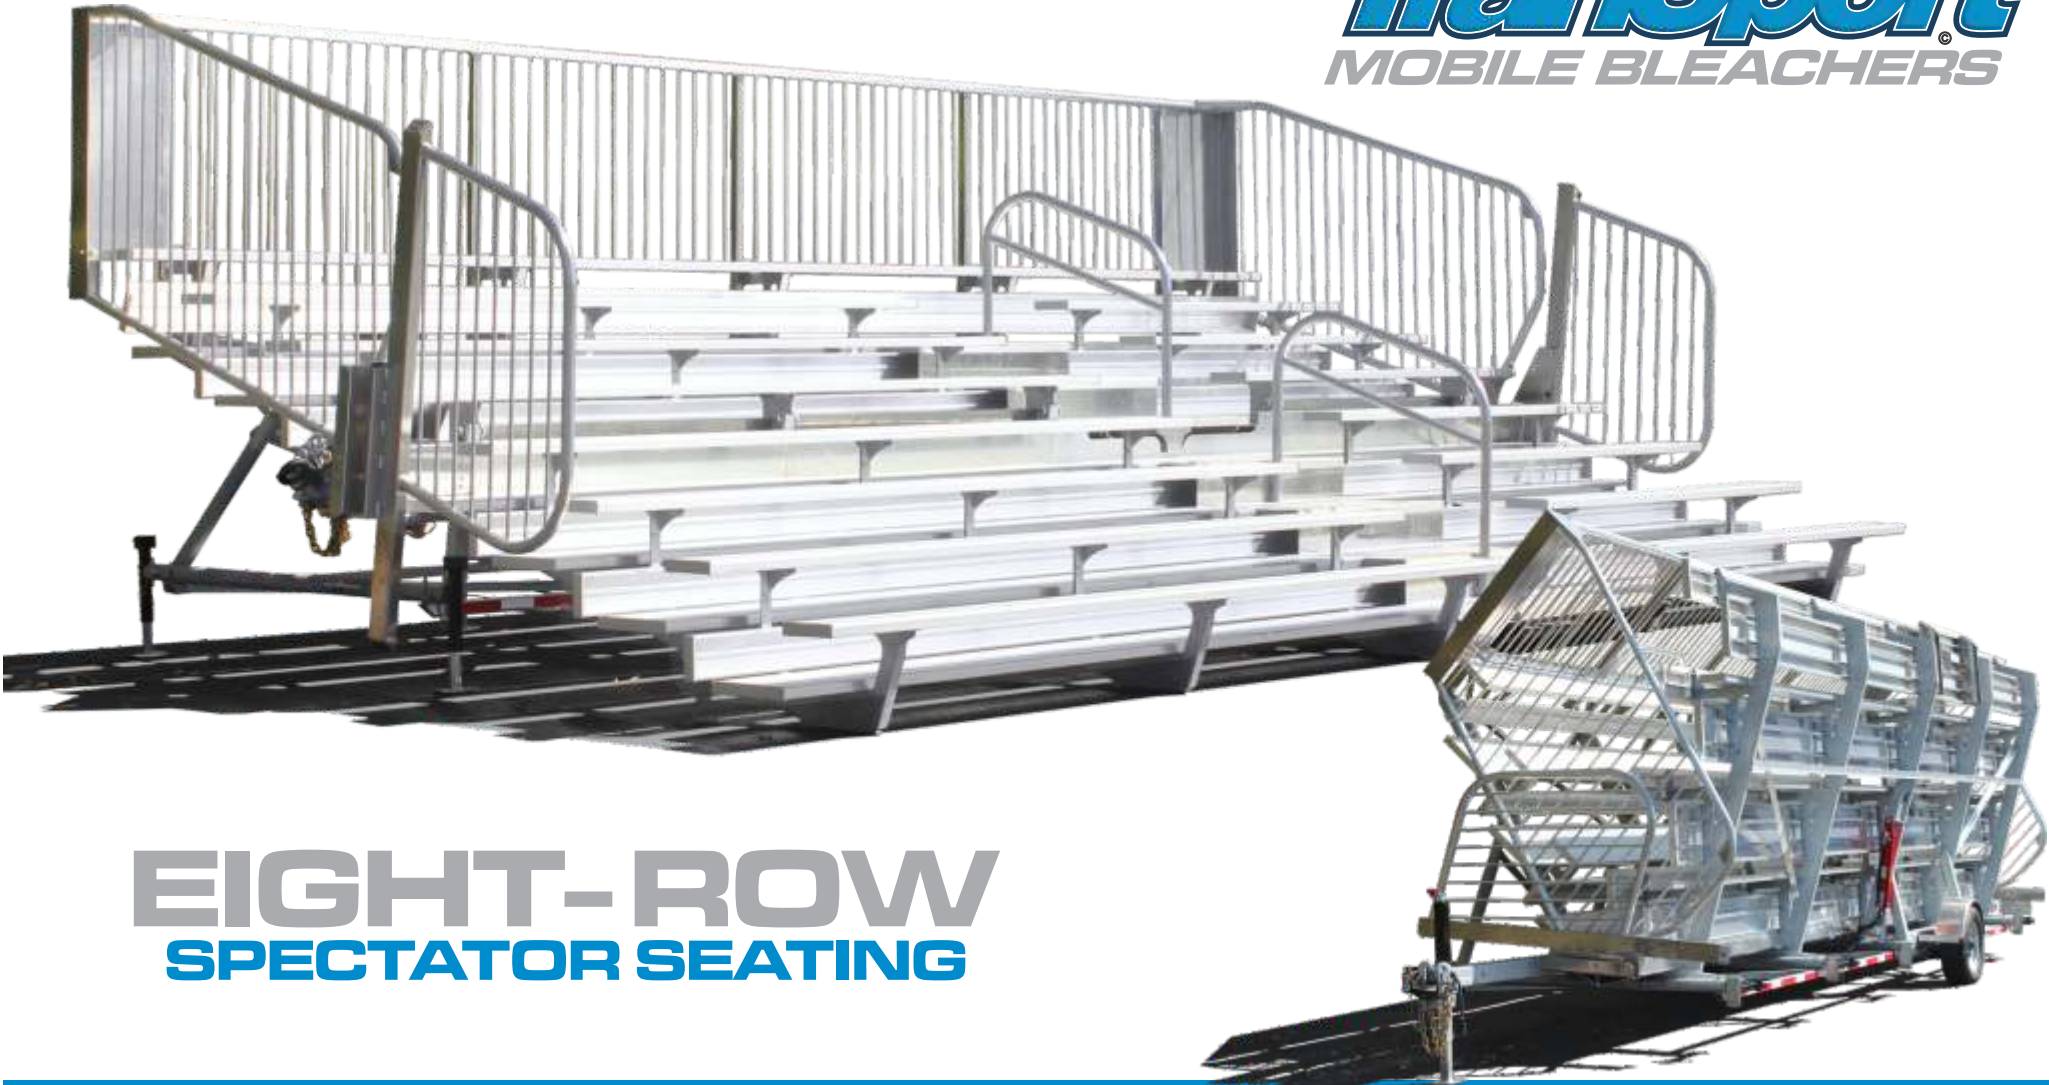

**EIGHT-ROW
SPECTATOR SEATING**

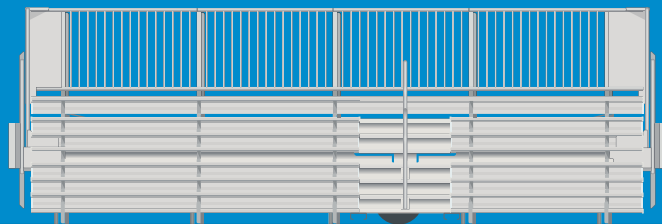

TSP8

STANDARD FEATURES

TSP8 model mobile bleachers provide you with outdoor mobile eight-row spectator seating that can be quickly and easily relocated throughout your community on public roads. TSP8 bleachers offer a compact design with reduced weight for easy towing and a high degree of maneuverability allowing positioning in confined locations. Reduced weight permits the use of smaller tow vehicles while reducing site impact and permitting operation on softer ground surfaces.

TSP8 mobile bleachers feature push-button opening and closing for fast, effortless, one-person set up.

TSP8 mobile bleachers are built from weather resistant materials to withstand outdoor use.

Overview

- 8 Rows high
- 24" Seat row spacing for increased comfort
- Aisle with ADA handrails - standard
- Uniform slope for increased safety and codes
- Concealed hinge points
- One person push-button setup
- Self-Stowing over-center design
- Reduced towing weight, reduced site impact
- Outdoor weather-resistant construction
- IBC2018 code compliance standard
- Delivered fully assembled, ready for use

Seat & Footboards

- Full length without gaps
- Extruded aluminum seat and foot planks
- Extra-width one-piece footboards
- IBC riser enclosures - standard

Guardrails

- Aluminum construction
- Rounded guardrails for comfort
- Attached to bleacher structure for automatic set up and positioning
- End guardrails remove to allow end-to-end bleacher placement

Leveling/Support

- Multiple frame mounted support jacks permit bleacher operation on soft surfaces.
- Jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel for unlevel or uneven terrain.
- Built-in frame-mounted anchoring lugs

Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed compartment
- Hydraulic actuation cylinder is retracted during transport and storage for maximum protection from damage and corrosion.
- Actuator does not penetrate main frame

Transport

- Hitch – choice of pintle, 2 5/16" ball coupler, or 2" (50mm) ball coupler
- Retractable hitch – permits end-to-end bleacher placement
- Electric brakes
- Highway rated tires
- Rugged single-axle suspension accommodates curbs and off-road towing
- Fenders
- LED DOT marker and signal lights

Weather Resistance

- Steel components plated or hot-dip galvanized after fabrication
- Anodized aluminum seatplanks

Optional Features

- ADA provisions
- Enclosed storage compartment
- Solar battery charger
- Spare tire

SPECIFICATIONS

		TSP8 144
Setup		
Seat Rows		8
Capacity (with Aisle)		125
Seat Length		27'- 0" (8.23m)
Overall Length		28'- 1" (8.58m)
Overall Depth		15'- 6" (4.73m)
Height - Top Seat		6'- 1" (1.85m)
Towing		
Axles		1
Coupler		Choice of Ball or Pintle
Length		34'- 1" (10.38m)
Width		8'- 1" (2.46m)
Height		10'- 10" (3.30m)
Tow Weight		4580 lbs (2078 kg)
Compliance		
IBC 2018		
DOT		

Specifications subject to change without notice.