



Shown with Optional Canopy

TSP8VIP
MOBILE PREMIUM SEATING

Premium Special Event Seating

Century's mobile TSP8VIP TranSport Mobile Grandstands offer premium seating with enhanced spectator comfort for upscale outdoor special events.


TSP8VIP grandstands feature 8 rows of all-weather molded individual seats with backrests and folding seat bottoms.

Equipped with a self-contained hydraulic actuation system, TSP8VIP bleachers feature push-button operation, and time saving efficiency. Extensive use of aluminum keeps towing weight to a minimum, reducing site impact while enhancing corrosion resistance.

Optional features including sun or weather canopies permit custom tailoring of the grandstands for increased spectator comfort.

Transport MOBILE BLEACHERS

TSPVIP8 Specifications

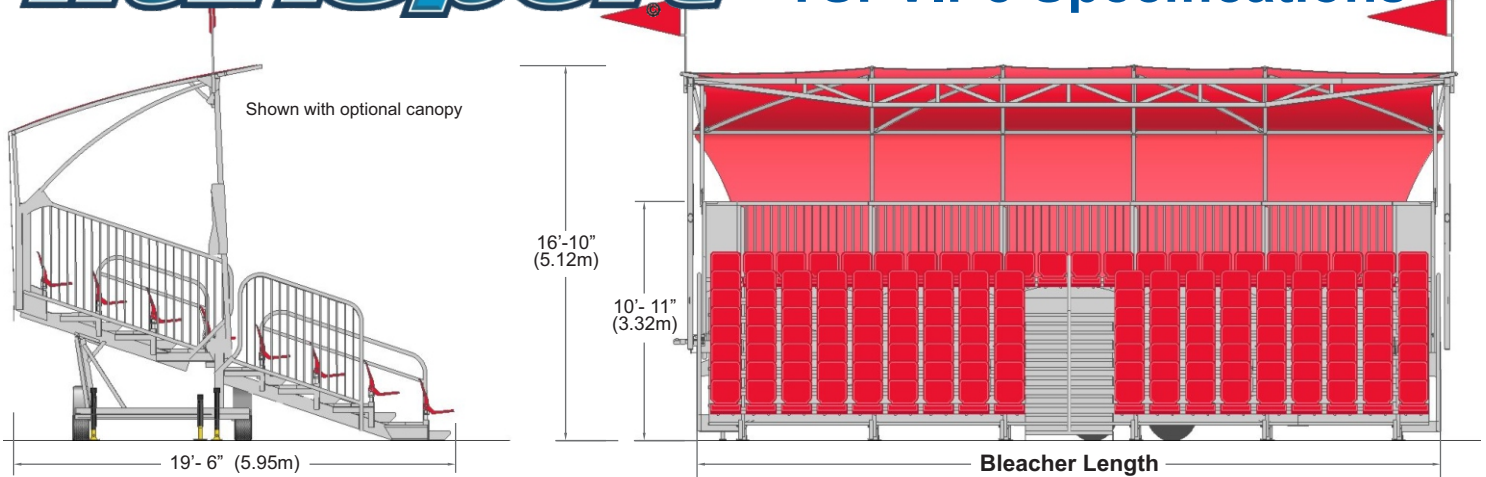

MODEL	SEATING			TRAILER DIMENSIONS			BLEACHER DIMENSIONS			Weight **
	Capacity	Rows	Length	Width	Length**	Height	Length	Depth	Height **	
TSPVIP8 - 27	123	8	27' (8.23 m)	8' (2.44 m)	33'- 10" (10.31 m)	12'- 7" (3.84 m)	28' (8.53 m)	19'- 6" (5.95 m)	10'- 11" (3.33 m)	7800 lbs (3538 kg)
TSPVIP8C - 27	123	8	27' (8.23 m)	8'- 4" (2.54 m)	34'- 2" (10.41 m)	13'- 1" (3.99 m)	29' (8.84 m)	20'- 3" (6.17 m)	10'- 11" (3.33 m)	8300 lbs (3765 kg)
TSPVIP8 - 45	219	8	45' (13.72 m)	8' (2.44 m)	51'- 10" (15.8 m)	12'- 7" (3.84 m)	46' (14.02 m)	19'- 6" (5.95 m)	10'- 11" (3.33 m)	11800 lbs (5353 kg)
TSPVIP8C - 45	219	8	45' (13.72 m)	8'- 4" (2.54 m)	52'- 2" (15.9 m)	13'- 1" (3.99 m)	47' (14.33 m)	20'- 3" (6.17 m)	10'- 11" (3.33 m)	12500 lbs (5670 kg)

** Trailer length includes hitch. *** Guardrail above ground level. **** Standard Bleacher

Overview

- 8 Seat rows
- Individual weather-resistant seats with backs and flip-up seat bottoms
- 30" Seat row spacing for increased comfort
- Aisle with ADA handrails - standard
- Uniform slope for increased safety and codes
- Concealed hinge points
- Push-button hydraulically powered setup
- Reduced towing weight, reduced site impact
- Outdoor weather-resistant construction
- IBC2018 code compliance standard

Guardrails

- Aluminum construction
- Rounded guardrails for spectator comfort
- Attached to bleacher structure for automatic set up and positioning

Footboards

- Full-width footboards
- Enclosed risers - standard

Actuation System

- Self-contained hydraulic actuation system powered by 12VDC battery system with built-in charger
- Mechanical components mounted in enclosed compartment
- Hydraulic actuation cylinder is retracted during transport and storage for maximum protection from damage and corrosion.

Support Structure

- 6" galvanized steel channel support structure
- Frame mounted anchor lugs

Leveling/Support

- Multiple jacks permit operation on soft surfaces.
- Jacks pivot 90 degrees to prevent damage during towing, reduce cranking, and increase adjustment travel on unlevel or uneven terrain.

Transport

- Hitch – retractable, with choice of pintle, or 2 5/16" ball coupler.
- Highway rated tires
- Rubber-ride suspension with electric brakes
- Fenders with mud flaps
- LED DOT marker and signal lights

Weather Resistance

- Steel components plated or hot-dipped galvanized
- Extensive use of corrosion-resistant aluminum
- Molded seats

Optional Features

- Sun or weather canopy
- Enclosed storage compartment
- Cup holders
- Numbered seats
- Solar battery charger
- Spare tire