


TSP12E

MOBILE GRANDSTAND

Quick Guide

Bleacher Setup

- Extend tongue jack ① and disconnect tow vehicle.
- Stow safety chains, 12V connector, emergency breakaway cable. Caution - Do not remove breakaway pin from switchbox.
- Level bleacher lengthwise using tongue jack (adjust to ground slope)
- Rotate leveling/support jacks ② to vertical, re-pin, extend jack legs to ground.
- Unpin outrigger jacks ③ (2) places, swing out, insert pins, extend jack legs to ground.
- Remove stairs and handrails from backside storage. ⑧
- Open lid on mechanical compartment. ④ Rotate timer switch to "ON" position. Remove control from compartment.
- Visually check that area is clear.
- Push "CLOSE" button to fully close grandstand, then push "OPEN" button until grandstand is fully extended.
- Secure lock chains ⑤ along rear of grandstand.
- Set lower guardrails at each end, ⑥ remove pin, rotate lower guardrail into place, pin in place and install keeper.
- Set-up walkway rail ⑨ by rotating rail to vertical and installing pins.
- Unpin and remove aisle handrails ⑦ from stored position and insert into aisleway.
- Install stairs and handrails at ends of walkway ⑩.
- Check leveling/support jacks ② and reset as required.
- Rotate timer switch to "OFF" position.
- Stow control pendant and close compartment lid and secure. ④

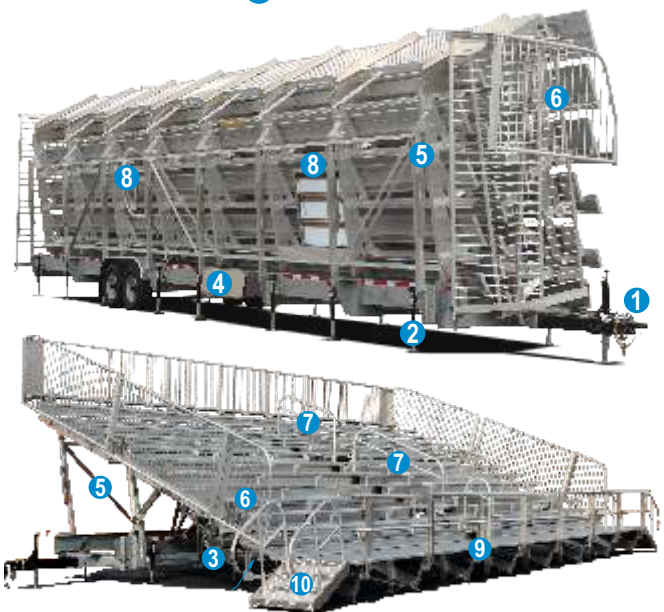

Bleacher Close

- **Remove aisle handrails, ⑦** return to storage position, secure with pin.
- Fold lower guardrails at each end, ⑥ remove pin, rotate lower guardrail into place, pin in place and install keeper.
- Remove stairs and rails at ends of walkway. ⑩
- Fold walkway rail flat with walkway ⑨ and secure with pins.
- **Release and store all rear lock chains. ⑤**
- Open lid on mechanical compartment. ④ Rotate timer switch to "ON" position. Remove control from compartment.
- Visually check that area is clear.
- Press and hold "CLOSE" button until bleacher is fully closed.
- Store and secure stairs and handrails. ⑧
- Rotate timer switch to "OFF" position. Store control pendant. ④ Close compartment lid.
- Extend tongue jack leg to ground contact.
- Retract outrigger jack legs, unpin, swing to travel position, repin ③ (2) places.
- Retract, rotate to horizontal, and repin all frame support jacks. ②
- Connect tow vehicle - coupler, safety chains, 12V connector, emergency breakaway cable.
- Check coupler, signal lights and brake operation prior to towing.

Read and understand operation guide prior to bleacher towing and operation.