

# TSP10


## MOBILE BLEACHER

### Quick Guide

#### Bleacher Setup

---

- Extend tongue jack ① and disconnect tow vehicle.
- Stow safety chains, 12V connector, emergency breakaway cable. Caution - Do not remove breakaway pin from switchbox.
- Level bleacher lengthwise using tongue jack (adjust to ground slope)
- Rotate all leveling/support jacks ② to vertical, re-pin, extend jack legs to ground.
- Level bleacher width-wise as required.
- **Retract tongue jack. ①**
- **Remove red hitch pin. ③**
- Open mechanical compartment lid. ④  
Rotate timer switch to “ON” position.  
Remove control from compartment.
- Visually check that area is clear.
- Press and hold **OPEN** to fully open bleacher.
- Unpin and remove aisle handrails ⑤ from stored positions and insert into aisleway.
- Check leveling/support jacks ② and reset as required.
- Rotate timer switch to “OFF” position.
- Stow control pendant, close compartment lid and secure. ④
- Retract hitch if desired. ⑥

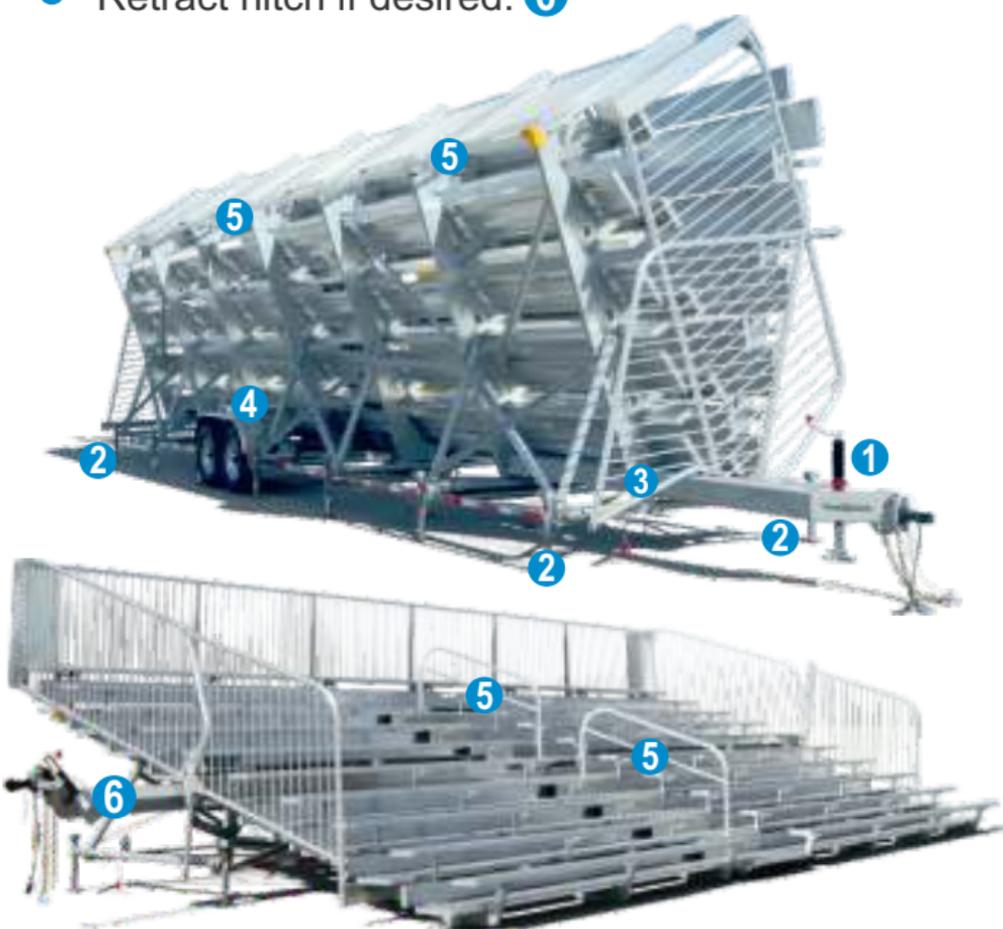

#### Bleacher Close

---

- **Remove aisle handrails, ⑤** return to storage positions, secure with pins.
- Extend hitch if retracted. ⑥
- Open mechanical compartment lid. ④  
Rotate timer switch to “ON” position.  
Remove control from compartment.
- Visually check that area is clear.
- Press and hold “**CLOSE**” button until bleacher is fully closed.
- Rotate timer switch to “OFF” position. Store control pendant. ④ Close compartment lid.
- **Insert red hitch pin. ③**
- Extend tongue jack leg to ground contact.
- Retract, rotate to horizontal, and repin all frame jacks. ②
- Connect tow vehicle - coupler, safety chains, 12V connector, emergency breakaway cable.
- Check coupler, signal lights and brake operation prior to towing.

Read and understand operation guide prior to bleacher towing and operation.