


TSP100C

MOBILE BLEACHER

Quick Guide

Setup

- Extend tongue jack **1** and disconnect tow vehicle.
- Unpin canopy transport lock bar. **2**
- Extend and re-pin canopy transport lock bar. **2**
- Remove canopy support lock pin. **3**
- Repeat **2 3** at opposite canopy end.
- Tighten winches **4** until canopy supports are straight, insert lock pins. **3** (It may be necessary to alternate ends until canopy is fully extended.)
- Using tongue jack, **1** level bleacher lengthwise.
- Unpin, rotate to vertical, repin front two corner jacks. **5**
- Extend jacks to ground level, level bleacher widthwise. **5**
- Unpin, rotate to vertical, repin remaining frame jacks. **6**
- Extend frame jacks to ground level, level bleacher widthwise. **6**
- **Remove hitch/transport lock-pin. 7**
- Open lid on mechanical compartment. **8**
Rotate timer switch to "ON" position.
Remove control from compartment.
- Visually check that area is clear.
- Press and hold "OPEN" button.
- Fully open bleacher. Adjust support jacks as required. **All jacks must contact surface. 6**
- Unpin and remove aisle handrails from stored position and insert into aisleway. **9**
- Slide tongue into bleacher frame (if desired). **10**
- Rotate timer switch to "OFF" position.
- Stow control pendant and close compartment lid and secure. **8**

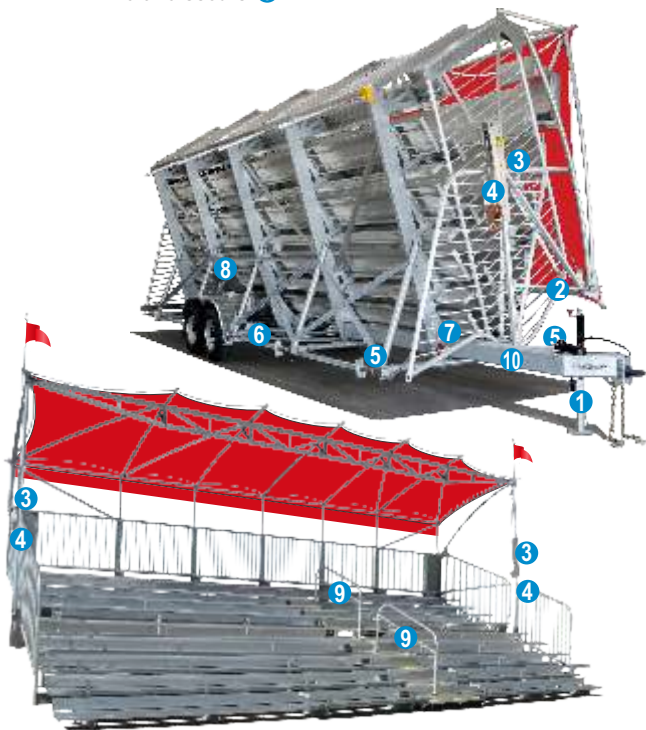

Close

- **Remove aisle handrails, 9** return to storage positions, secure with pin.
- Extend towing tongue (if retracted). **10**
- Open lid on mechanical compartment. Rotate timer switch to "ON" position. **8**
Remove control from compartment.
- Visually check that area is clear.
- Press and hold "CLOSE" button until bleacher is fully closed.
- **Install hitch/transport lock-pin. 7**
- Rotate timer switch to "OFF" position. Store control pendant. **8** Close compartment lid.
- Attach and pin tongue jack (if removed). **1**
- Extend tongue jack leg to ground contact. **1**
- Remove pins from canopy support columns at each end. **3**
- Loosen winches at each end (alternating ends) until canopy structure is closed. **4**
- Repin canopy transport lock bar **2** and canopy support column **3** at each end.
- Retract, rotate to horizontal, and repin all frame jacks. **6 5**
- Connect tow vehicle - coupler, safety chains, 12V connector, emergency breakaway cable.
- Check coupler, signal lights and brake operation prior to towing.

Read and understand operation guide prior to towing and operation.