

Provide attractive, rugged, covered, commercial level event staging in a fraction of the time and labor traditionally required for comparable outdoor remote site staging.

Century's FR4500 series of mobile stages feature an innovative operating system, with hydraulic actuation, that sets up quickly and easily, eliminating the time and personnel required for conventional portable and mobile stage systems.

Select a stage size along with the desired optional features to tailor a stage that best serves your current event requirements, while allowing for future growth, and expanding your capabilities.

> With a FR4500 outdoor mobile stage, you enjoy increased:

Capability

· Capacity

· Flexibility


· Utility

And, in addition to saving you money, a front row stage can return money to your program through rental income, thus increasing utilization and paying its way.

Capable of accommodating a wide range of outdoor events and activities, a FrontRow mobile stage can support the performance requirements for the whole community.



Series 4500 Mobile Concert Stages

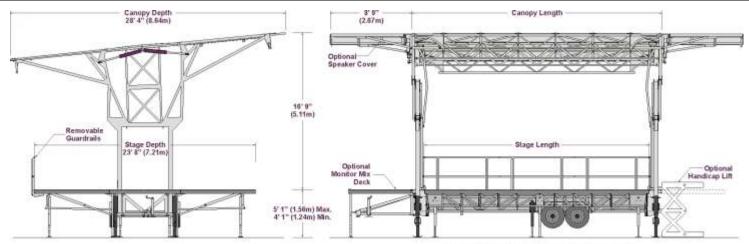


FrontRow 4500 Mobile Concert Stages



www.centuryindustries.com (800)248-3371

Engineer Certified

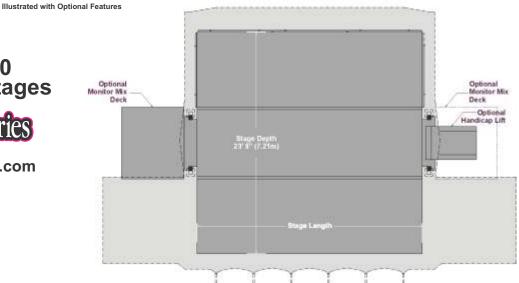

FrontRow Mobile Concert Stage Standard Features

- Self-contained hydraulic system with remote control, deep-cycle battery, and battery charger for fast, easy, one-person operation.
- Powered roof canopy full coverage roof extends beyond the deck edges. Aluminum support structure is covered by rugged vinyl coated polyester fabric.
- Powered stage deck all-weather folding stage decks form 24ft (7.32m) deep stage.
- Heavy-duty tandem-axle suspension equalizer system allows towing over curbs and uneven ground. Electric brakes on all wheels.
- Pintle towing coupler rugged lunette ring coupler (optional hitches available) mounted on folding towing hitch.
- Heavy-duty tongue jack crank jack mount on towing tongue
- Rugged main frame welded aluminum and steel backbone frame.

- Crank leveling/support jacks heavy-duty frame mounted jacks provide stage leveling.
- Deck support truss folding decks are supported by welded aluminum leveling trusses for accurate expedited set up.
- Enclosed mechanical compartment welded aluminum compartment protects system components.
- Breaker panel 220V 125 amp capacity load center routes electrical power for stage.
- LED interior lights frame mounted 120V lights illuminate the stage roof and stage deck area.
- Stairs aluminum treadplate stair with enclosed risers and handrails - attach to stage deck perimeter.
- DOT required LED signal, marker lights, reflectors, and license light, with 12VDC connector cable.
- Operation training provided by factory representative (continental US)

MODEL	STAGE DECK	TOW LENGTH	EMPTY WEIGHT
FR4524	24' X 24' (7.32 x 7.32m)	34' (10.36m)	10,000lbs (4536kg)
FR4532	24' X 32' (7.32 x 9.75m)	42' (12.80m)	11,400lbs (5171kg)
FR4540	24' X 40' (7.32 x 12.19m)	50' (15.24m)	13,000lbs (5897kg)